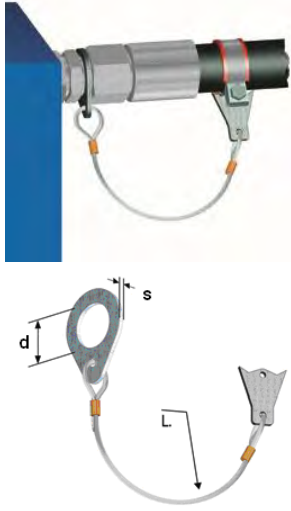
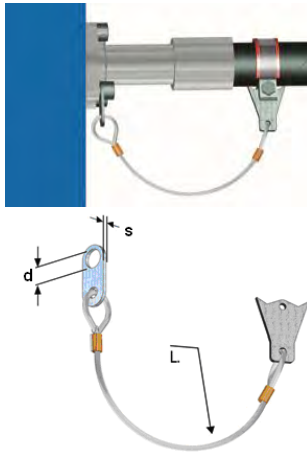
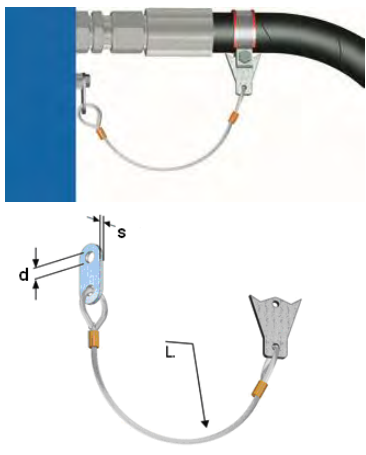


Zabezpečení – systém STOPFLEX®

obrázek	index	vnitřní průměr oka d [mm]	síla oka s [mm]	délka lanka L [mm]	max. pracovní tlak [bar]	použití
	OP-SF-DIN-14	14,5	2	300	450	8L – 1/4"
	OP-SF-DIN-17	17			445	8S – 10L – 3/8"
	OP-SF-DIN-18	18,5			420	10S – 12L
	OP-SF-DIN-20	20,5				12S
	OP-SF-DIN-22	22,5				14S – 15L- 1/2"
	OP-SF-DIN-24	24,5				16S – 5/8"
	OP-SF-DIN-26	26,5				18L – 3/4"
	OP-SF-DIN-30	30,5	2,5	450	20S – 22L	
	OP-SF-DIN-34	34			1"	
	OP-SF-DIN-36	36,5			25S – 28L	
	OP-SF-DIN-42	42,5			30S-1.1/4"	
	OP-SF-DIN-45	45,5			35L	
	OP-SF-DIN-49	49			1.1/2"	
	OP-SF-DIN-52	52,5			385	38S – 42L
OP-SF-DIN-60	60	350	2"			
	OP-SF-SAE-08	8,5	4	300	415	SAE 1/2" – 3000 PSI, SAE 1/2" – 6000 PSI
	OP-SF-SAE-10-300	10,5		300	420	SAE 3/4" – 3000 PSI
	OP-SF-SAE-10	10,5	450	SAE 3/4" – 6000 PSI, SAE 1-1.1/4" – 3000 PSI		
	OP-SF-SAE-12	12,5		SAE 1" – 6000 PSI, SAE 1.1/2 - 2" – 3000 PSI		
	OP-SF-SAE-14	14,5		SAE 1.1/4" – 6000 PSI		
	OP-SF-SAE-16	16,5		SAE 1.1/2" – 6000 PSI		
	OP-SF-SAE-20	20,5	350	SAE 2" – 6000 PSI		
	OP-SF-SAE-25	25	8	550	210	-
OP-SF-SAE-32	32	-				
	OP-SF-V	13	4	450	420	univerzální