


Symetrické spojky STORZ

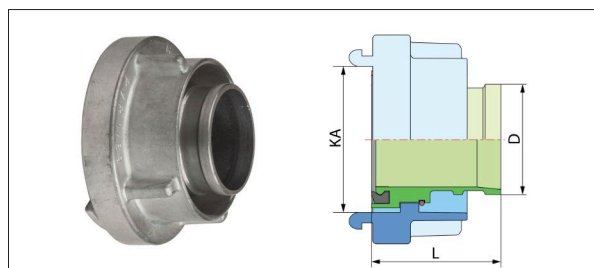


Spojka s koncovkou pro tlakové hadice

Materiál: hliník (Al), mosaz (Ms),
Prac. tlak: 16 bar
Těsnění: bílá pryž NBR pro hliník,
 černá pryž NBR pro mosaz

index (hliník)	index (mosaz)	index (nerez)	rozměr	rozeť západek KA [mm]	průměr hadice D [mm]	délka L Al / Ms / SS [mm]
ST-11-059045-16	-	-	45	59	45	75 / - / -
ST-11-066040-16	-	-	52-C	66	40	70 / - / -
ST-11-066042-16	ST-11-066042-35	-			42	55 / 55 / -
ST-11-066045-16	-	-			45	70 / - / -
ST-11-066052-16	ST-11-066052-35	-			52	55 / 75 / -
ST-11-066052-25*	-	-			52	55 / - / -
ST-11-066055-16	-	-			55	70 / - / -
ST-11-081052-16	-	-	65	81	52	60 / - / -
ST-11-081065-16	-	-			65	60 / - / -
ST-11-081075-16	-	-			75	65 / - / -
ST-11-089065-16	-	-	75-B	89	65	85 / - / -
ST-11-089070-16	-	-			70	75 / - / -
ST-11-089075-16	ST-11-089075-35	-			75	60 / 85 / -
ST-11-089075-25*	-	-			75	60 / - / -
ST-11-115100-16	-	-	100	115	100	85 / - / -
ST-11-133100-11	-	-	110-A	133	100	110 / - / -
ST-11-133110-11	-	-			110	110 / - / -

* - odlévaná verze PN 6 bar

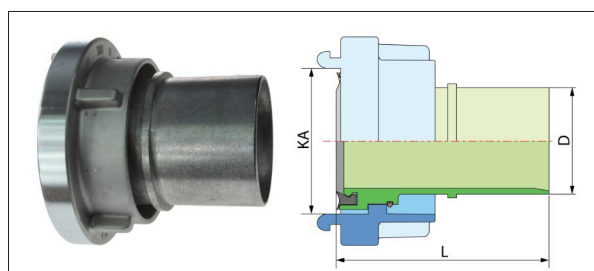

Spojka s koncovkou pro objímku RS pro sací a tlakové hadice

Materiál: hliník (Al), mosaz (Ms),
 nerez (SS)
Prac. tlak: 16 bar
Těsnění: bílá pryž NBR pro hliník,
 černá pryž NBR pro mosaz,
 viton pro nerez

index (hliník)	index (mosaz)	index (nerez)	rozměr	rozeť západek KA [mm]	průměr hadice D [mm]	délka L Al / Ms / SS [mm]
-	ST-13-031019-30	ST-13-031019-43	25-D	31	19	- / 73 / 73
ST-13-031025-11	ST-13-031025-30	ST-13-031025-43			25	75 / 73 / 75
-	-	ST-13-066032-43	52-C	66	32	- / - / 95
ST-13-066038-11	-	ST-13-066038-43			38	90 / - / 95
ST-13-066050-11	ST-13-066050-30	ST-13-066050-43			50	95 / 95 / 95
-	-	ST-13-081050-43	65	81	50	- / - / 95
ST-13-089063-11	-	-	75-B	89	63	115 / - / -
ST-13-089075-11	-	ST-13-089075-43			75	105 / - / 105
ST-13-115100-11	-	-	100	115	100	195 / - / -
ST-13-133100-11	-	ST-13-133100-43	110-A	133	100	145 / - / 145
ST-13-148125-11	-	-	125	148	125	190 / - / -
ST-13-160150-11	-	-	150	160	150	250 / - / -