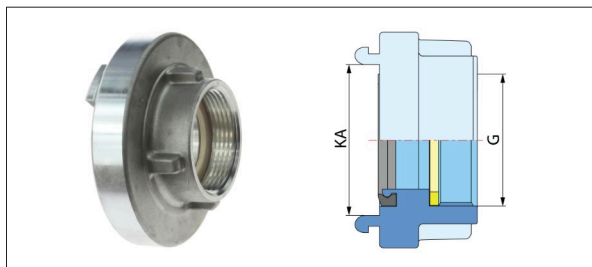


Symetrické spojky STORZ

Adaptér s vnitřním závitem BSP

Materiál: hliník (Al), mosaz (Ms),
 nerez (SS)
Prac. tlak: 16 bar
Těsnění: bílá pryž NBR pro hliník,
 černá pryž NBR pro mosaz,
 viton pro nerez

index (hliník)	index (mosaz)	index (nerez)	rozměr	rozteč západek KA [mm]	rozměr závitů G [coul]
ST-21-031050-11	ST-21-031050-30	ST-21-031050-43	25-D	31	1/2
ST-21-031075-11	ST-21-031075-30	ST-21-031075-43			3/4
ST-21-031100-11	ST-21-031100-30	ST-21-031100-43			1
ST-21-031125-11	-	-			1.1/4
ST-21-044100-11	ST-21-044100-30	-	32	44	1
ST-21-044125-11	ST-21-044125-30	-			1.1/4
ST-21-051100-11	ST-21-051100-30	-	38	51	1
ST-21-051125-11	ST-21-051125-30	ST-21-051125-43			1.1/4
ST-21-051150-11	ST-21-051150-30	ST-21-051150-43			1.1/2
ST-21-051200-11	ST-21-051200-30	-			2
ST-21-059150-16	-	-	45	59	1.1/2
ST-21-059200-16	-	-			2
ST-21-066075-16	-	ST-21-066075-43	52-C	66	3/4
ST-21-066100-16	ST-21-066100-30	ST-21-066100-43			1
ST-21-066125-16	ST-21-066125-30	ST-21-066125-43			1.1/4
ST-21-066150-16	ST-21-066150-30	ST-21-066150-43			1.1/2
ST-21-066175-16	-	-			1.3/4
ST-21-066200-16	ST-21-066200-30	ST-21-066200-43			2
ST-21-066250-16	ST-21-066250-30	ST-21-066250-43*			2.1/2
ST-21-081100-11	-	-			65
ST-21-081125-11	-	-	1.1/4		
ST-21-081150-11	-	-	1.1/2		
ST-21-081200-11	ST-21-081200-30	ST-21-081200-43	2		
ST-21-081250-11	ST-21-081250-30	ST-21-081250-43	2.1/2		
ST-21-081300-11	ST-21-081300-30	-	3		
ST-21-089200-16	ST-21-089200-30	ST-21-089200-43	75-B	89	2
ST-21-089250-16	ST-21-089250-30	ST-21-089250-43			2.1/2
ST-21-089300-16	ST-21-089300-30	ST-21-089300-43			3
ST-21-105300-11	-	-	90	105	3
ST-21-115400-11	ST-21-115400-30	ST-21-115400-43	100	115	4
ST-21-133300-11*	-	-	110-A	133	3
ST-21-133400-11	ST-21-133400-30	ST-21-133400-43			4
ST-21-133450-11	ST-21-133450-30	ST-21-133450-43			4.1/2
ST-21-133500-11**	-	-			5
ST-21-148400-11	-	-	125	148	4
ST-21-148500-11	ST-21-148500-30	ST-21-148500-43			5
ST-21-160600-11	ST-21-160600-30	ST-21-160600-43	150	160	6
ST-21-188600-11***	-	-	165	188	6
ST-21-220800-11***	-	-	205	220	8
ST-21-278000-11***	-	-	250	278	10

* - s redukcí

** - s mufnou

*** - PN 10 bar