


## Symetrické spojky STORZ



### Adaptér s vnějším závitem BSP s pojistnou západkou

**Materiál:** hliník (Al), nerez (SS)  
**Prac. tlak:** 16 bar  
**Těsnění:** bílá pryž NBR pro hliník, viton pro nerez

| index<br>(hliník) | index<br>(mosaz) | index<br>(nerez) | rozměr | rozteč<br>západek KA<br>[mm] | rozměr<br>závitu<br>[coul] |
|-------------------|------------------|------------------|--------|------------------------------|----------------------------|
| ST-27-031100-11   | -                | -                | 25-D   | 31                           | 1                          |
| ST-27-051150-11   | -                | -                | 38     | 51                           | 1.1/2                      |
| ST-27-066200-11   | -                | -                | 52-C   | 66                           | 2                          |
| ST-27-081250-11   | -                | -                | 65     | 81                           | 2.1/2                      |
| ST-27-089250-11   | -                | -                | 75-B   | 89                           | 2.1/2                      |
| ST-27-089300-11   | -                | -                |        |                              | 3                          |
| ST-27-105300-11   | -                | -                | 90     | 105                          | 3                          |
| ST-27-115400-11   | -                | -                | 100    | 115                          | 4                          |
| ST-27-133400-11   | -                | ST-27-133400-43  | 110-A  | 133                          | 4                          |
| ST-27-133450-11   | -                | -                |        |                              | 4.1/2                      |
| ST-27-148500-11   | -                | -                | 125    | 148                          | 5                          |
| ST-27-160600-11   | -                | -                | 150    | 160                          | 6                          |

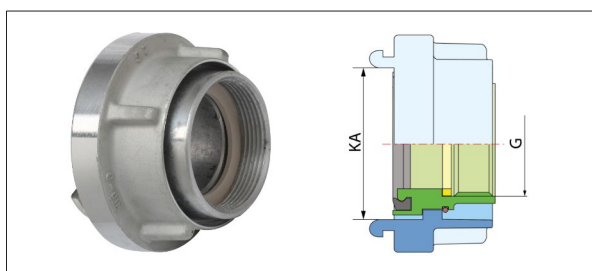

### Otočná spojka s vnitřním závitem BSP

**Materiál:** hliník (Al), mosaz (Ms), nerez (SS)  
**Prac. tlak:** 16 bar  
**Těsnění:** bílá pryž NBR pro hliník, černá pryž NBR pro mosaz, viton pro nerez

| index<br>(hliník) | index<br>(mosaz) | index<br>(nerez) | rozměr | rozteč<br>západek KA<br>[mm] | rozměr<br>závitu G<br>[coul] |
|-------------------|------------------|------------------|--------|------------------------------|------------------------------|
| -                 | ST-23-031075-30  | -                | 25-D   | 31                           | 3/4                          |
| -                 | ST-23-031100-30  | -                |        |                              | 1                            |
| ST-23-066125-11   | -                | -                | 52-C   | 66                           | 1.1/4                        |
| ST-23-066150-11   | -                | ST-23-066150-43  |        |                              | 1.1/2                        |
| ST-23-066200-11   | ST-23-066200-30  | ST-23-066200-43  | 65     | 81                           | 2                            |
| ST-23-081200-11   | -                | -                |        |                              | 2                            |
| ST-23-081250-11   | -                | -                | 75-B   | 89                           | 2.1/2                        |
| ST-23-081300-11   | -                | -                |        |                              | 3                            |
| ST-23-089200-11   | -                | ST-23-089200-43  | 90     | 105                          | 2                            |
| ST-23-089250-11   | -                | ST-23-089250-43  |        |                              | 2.1/2                        |
| ST-23-089300-11   | -                | ST-23-089300-43  | 100    | 115                          | 3                            |
| ST-23-105300-11   | -                | -                |        |                              | 3                            |
| ST-23-115400-11   | -                | -                | 110-A  | 133                          | 4                            |
| ST-23-133300-11   | -                | -                |        |                              | 3                            |
| ST-23-133400-11   | -                | ST-23-133400-43  | 125    | 148                          | 4                            |
| ST-23-148400-11   | -                | -                |        |                              | 4                            |
| ST-23-148500-11   | -                | -                | 150    | 160                          | 5                            |
| ST-23-160400-11   | -                | -                |        |                              | 4                            |
| ST-23-160500-11   | -                | -                | 150    | 160                          | 5                            |
| ST-23-160600-11   | -                | -                |        |                              | 6                            |