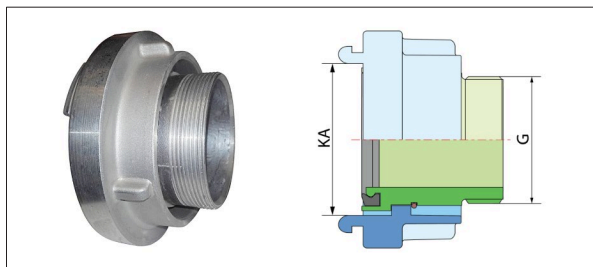


**Symetrické spojky STORZ**

**Otočná spojka s  
vnějším závitem BSP**

**Materiál:** hliník (Al), mosaz (Ms),  
nerez (SS)  
**Prac. tlak:** 16 bar  
**Těsnění:** bílá pryž NBR pro hliník,  
černá pryž NBR pro mosaz,  
viton pro nerez

index (hliník)	index (mosaz)	index (nerez)	rozměr	rozteč západek KA [mm]	rozměr závitů G [coul]
-	ST-24-031075-30	-	25-D	31	3/4
-	ST-24-031100-30	-			1
ST-24-066150-11	-	-	52-C	66	1.1/2
ST-24-066200-11	ST-24-066200-30	ST-24-066200-43			2
ST-24-081150-11	-	-	65	81	1.1/2
ST-24-081200-11	-	-			2
ST-24-081250-11	-	-			2.1/2
ST-24-081300-11	-	-			3
ST-24-089200-11	-	ST-24-089200-43	75-B	89	2
ST-24-089250-11	-	ST-24-089250-43			2.1/2
ST-24-089300-11	-	-			3
ST-24-105300-11	-	-	90	105	3
ST-24-115300-11	-	-	100	115	3
ST-24-115400-11	-	-			4
ST-24-133300-11	-	-	110-A	133	3
ST-24-133400-11	-	ST-24-133400-43			4
ST-24-148400-11	-	-	125	148	4
ST-24-148500-11	-	-			5
ST-24-160450-11	-	-	150	160	4.1/2
ST-24-160500-11	-	-			5
ST-24-160600-11	-	-			6


**Věšák na spojku**

**Materiál:** pozinkovaná ocel (St)

index	pro rozměr spojky	rozteč západek KA [mm]
ST-79-066000-50	52-C	66
ST-79-089000-50	75-B	89
ST-79-133089-50	110-A / 75-B	133 / 89