

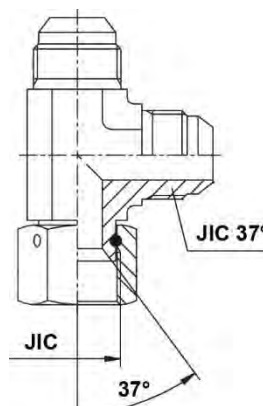


Spojky SAE J514 (JIC 37°)

popis	tlak [bar]	index (pozinkovaná ocel)	index (AISI 316)	vněj. prům. trubky		JIC [UN-UNF]
				[mm]	[coul]	
Spojka úhlová, stavitelná  EVW	450	HJ-EVW-07	HJ-EVW-07-SS	6	1/4	7/16-20
		HJ-EVW-08	HJ-EVW-08-SS	8	5/16	1/2-20
	350	HJ-EVW-09	HJ-EVW-09-SS	10	3/8	9/16-18
		HJ-EVW-12	HJ-EVW-12-SS	12	1/2	3/4-16
		HJ-EVW-14	HJ-EVW-14-SS	14-15-16	5/8	7/8-14
		HJ-EVW-17	HJ-EVW-17-SS	18-20	3/4	1.1/16-12
	290	HJ-EVW-21	HJ-EVW-21-SS	25	1	1.5/16-12
	240	HJ-EVW-26	HJ-EVW-26-SS	30-32	1.1/4	1.5/8-12
		HJ-EVW-30	HJ-EVW-30-SS	38	1.1/2	1.7/8-12

popis	tlak [bar]	index (pozinkovaná ocel)	index (AISI 316)	vněj. prům. trubky		JIC [UN-UNF]
				[mm]	[coul]	
T-kus, stavitelný  EVT	450	HJ-EVT-07	HJ-EVT-07-SS	6	1/4	7/16-20
		HJ-EVT-08	HJ-EVT-08-SS	8	5/16	1/2-20
	350	HJ-EVT-09	HJ-EVT-09-SS	10	3/8	9/16-18
		HJ-EVT-12	HJ-EVT-12-SS	12	1/2	3/4-16
		HJ-EVT-14	HJ-EVT-14-SS	14-15-16	5/8	7/8-14
		HJ-EVT-17	HJ-EVT-17-SS	18-20	3/4	1.1/16-12
	290	HJ-EVT-21	HJ-EVT-21-SS	25	1	1.5/16-12
	240	HJ-EVT-26	HJ-EVT-26-SS	30-32	1.1/4	1.5/8-12
		HJ-EVT-30	HJ-EVT-30-SS	38	1.1/2	1.7/8-12

popis	tlak [bar]	index (pozinkovaná ocel)	index (AISI 316)	vněj. prům. trubky		JIC [UN-UNF]
				[mm]	[coul]	
T-kus, stavitelný, asymetrický  EVL	450	HJ-EVL-07	HJ-EVL-07-SS	6	1/4	7/16-20
		HJ-EVL-08	HJ-EVL-08-SS	8	5/16	1/2-20
	350	HJ-EVL-09	HJ-EVL-09-SS	10	3/8	9/16-18
		HJ-EVL-12	HJ-EVL-12-SS	12	1/2	3/4-16
		HJ-EVL-14	HJ-EVL-14-SS	14-15-16	5/8	7/8-14
		HJ-EVL-17	HJ-EVL-17-SS	18-20	3/4	1.1/16-12
	290	HJ-EVL-21	HJ-EVL-21-SS	25	1	1.5/16-12
	240	HJ-EVL-26	HJ-EVL-26-SS	30-32	1.1/4	1.5/8-12
		HJ-EVL-30	HJ-EVL-30-SS	38	1.1/2	1.7/8-12